

Sanitarios y Suites de Baño

Serie Race



- Fibra de carbono
- Disponible en acabado mate o brillo
- Toda una gama de colores a elegir
- Tamaño estándar y pequeño
- Muy ligero

Serie Race	
Referencia	Descripción
Brillante	
PLRACE-12V/CL	WC RACE 12V CARBONIO LUCIDO
PLRACE-24V/CL	WC RACE 24V CARBONIO LUCIDO
PLRACE-230V/CL	WC RACE 230V CARBONIO LUCIDO
PLRACE BIDET/CL	BIDET RACE CARBONIO LUCIDO
PLRACE S-12V/CL	WC RACE SHORT 12V CARBONIO LUCIDO
PLRACE S-24V/CL	WC RACE SHORT 24V CARBONIO LUCIDO
PLRACE S-230V/CL	WC RACE SHORT 230V CARBONIO LUCIDO
PLRACE SHORT BIDET/CL	BIDET RACE SHORT CARBONIO LUCIDO
Opaco	
PLRACE-12V/CO	WC RACE 12V CARBONIO OPACO
PLRACE-24V/CO	WC RACE 24V CARBONIO OPACO
PLRACE-230V/CO	WC RACE 230V CARBONIO OPACO
PLRACE BIDET/CO	BIDET RACE CARBONIO OPACO
PLRACE S-12V/CO	WC RACE SHORT 12V CARBONIO OPACO
PLRACE S-24V/CO	WC RACE SHORT 24V CARBONIO OPACO
PLRACE S-230V/CO	WC RACE SHORT 230V CARBONIO OPACO
PLRACE SHORT BIDET/CO	BIDET RACE SHORT CARBONIO OPACO
Color Ral	
PLRACE-12V/RAL	WC RACE 12V COLORE RAL
PLRACE-24V/RAL	WC RACE 24V COLORE RAL
PLRACE-230V/RAL	WC RACE 230V COLORE RAL
PLRACE BIDET/RAL	BIDET RACE COLORE RAL
PLRACE S-12V/RAL	WC RACE SHORT 12V COLORE RAL
PLRACE S-24V/RAL	WC RACE SHORT 24V COLORE RAL
PLRACE S-230V/RAL	WC RACE SHORT 230V COLORE RAL
PLRACE SHORT BIDET/RAL	BIDET RACE SHORT COLORE RAL

La alta velocidad de rotación de la bomba de vórtice y el diseño geométrico de la tubería de todos los equipos Planus permiten crear un gran vacío capaz de eliminar el agua y los residuos orgánicos de la taza. El alto nivel de rendimiento garantizan la máxima flexibilidad en la planificación de la ruta de las mangueras de descarga, que le permite alcanzar distancias y alturas importantes.

TECHNICAL SPECIFICATION OF THE MAIN COMPONENTS

Vortex Discharge Pump

Hydraulic performances: up to 9 m vertically, up to 80 m horizontally	Voltage	12 Vdc	24 Vdc	230 Vac
	Absorption	35 A	25 A	3 A

Inlet Electrovalve

<u>DIRECT ACTING</u> Version (for both fresh water and sea water inlet systems)	Voltage	12 Vdc	24 Vdc	230 Vac
	Absorption	80 W	80 W	80 W
<u>SERVO PILOTED</u> Version (for fresh water inlet only)	Voltage	12 Vdc	24 Vdc	230 Vac
	Absorption	15 W	15 W	15 W

Independent Inlet Pump

Voltage	12 Vdc	24 Vdc	230 Vac
Absorption	3.6 A	1.8 A	

Centralized Inlet Pump (not supplied)

Recommended specifications	Working Pressure	Min 1 bar—Max 3 bar
----------------------------	------------------	---------------------




Discharge
pressure
0.9 bar
(9m)




Up to 80 m


1	CARBON BOWL		
2	COMPLETE FIXING BRACKET	PW.026.00	
3	VORTEX OUTLET PUMP	12v	PW.001.00
		24v	PW.002.00
		230v	PW.034.00
3a	Motor	12v	04.001.00
		24v	04.002.00
		230v	04.025.00
3b	Flange for pump		02.005.00
3c	Sealing for pump		03.006.00
3d	Stationary seal for impeller		05.001.00
3e	Rotatory seal for impeller		05.002.00
3f	Impeller		02.004.00
3g	Housing for pump		02.003.00
3h	One-way valve		03.005.00
3i	Clamp for one-way valve		02.009.00
4	SIPHONE HOSE		PW.003.00
5	DISCHARGE HOSE COMPLETE		PW.005.00
5a	Discharge hose		03.002.00
5b	One-way valve - Assembly		PW.006.00
6	CARBON TOILET WATER INLET		PW.009.00
7	SEAT&COVER IN CARBON		
8	CARBON TOILET FIXING BRACKETS		PW.037.00

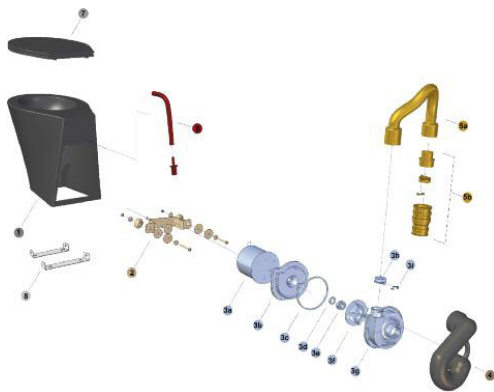

Toilet and bidet Standard

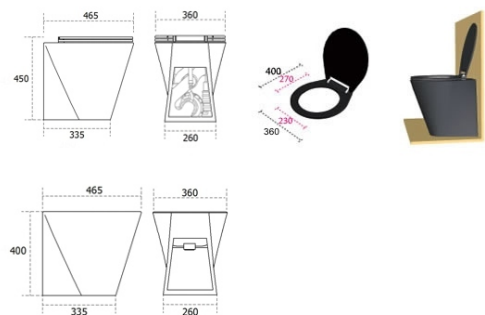

Toilet and bidet Short

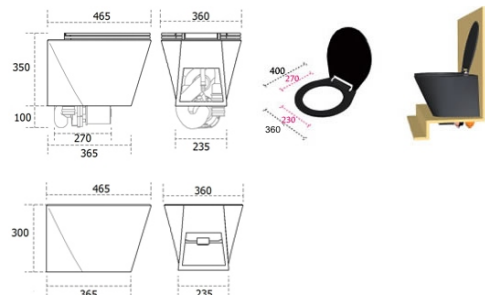

CONNECTIONS

Hydraulic Connections

Inlet	Hose with ID of 20 mm (3/4")
Outlet	Hose with ID of 40 mm (1 1/2")

Electrical Connections

Voltage	12 Vdc	24 Vdc	230 Vac
Minimal wire gauge up to 5 m	6 mm ² (9 AWG)	4 mm ² (11 AWG)	0.75 mm ² (18 AWG)
Minimal wire gauge over 5 m	10 mm ² (7 AWG)	6 mm ² (9 AWG)	1 mm ² (17 AWG)

INFO

Weight:	26kg (High Version) - 23.5 kg (Short Version)
Average Water Consumption:	1.5 l
Color:	White (black or bone optional)
Seat:	Wood covered with casting resin
Hinges:	Stainless steel (soft closing system optional)
Integrated bidet:	Optional