

Hélices Retráctiles

Compact Retract™



Cuando el rendimiento es lo más importante, los propulsores retráctiles hidráulicos representan la solución ideal. Debido a su ligereza, potencia y a que permiten una distribución de peso casi perfecta, los más prestigiosos astilleros a nivel mundial usan este tipo de hélices.

Combinando el costo y simplicidad efectiva de las hélices eléctricas de corriente continua con las características de alto rendimiento de las unidades retráctiles, el rango de fuerza de empuje retráctil eléctrico es ideal para veleros modernos y yates a motor.



Especificaciones técnicas de las hélices maniobra y propulsión

Details:	12V	24V
Product ref.:	RTE085012	RTE085024
Typical boat size:	30 - 47'	34 - 52'
Tunnel diameter (inside):	185mm	185mm
Tunnel thickness:	6 - 7mm	6 - 7mm
Nominal power voltage:	12V	24V
Control system voltage:	12V	24V
Weight:	40kg	40kg


Performance data:

Test power voltage:	10.75V	22V
Amperage:	446 Amps	240 Amps
kW:	4.79	5.28
Hp:	6.4	7.1
Thrust kg/lbs:	70 /154	85 /187
Duty Cycle (S2):	3.5min	4.5min

POSITION FERMEE
RETRACTED POSITION

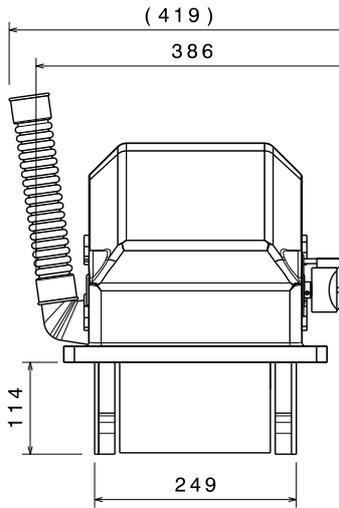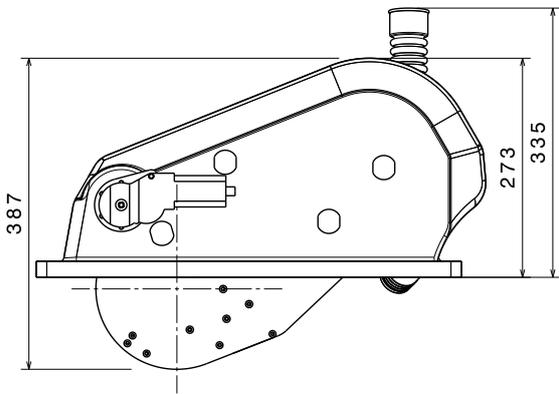

POSITION OUVERTE
DEPLOYED POSITION

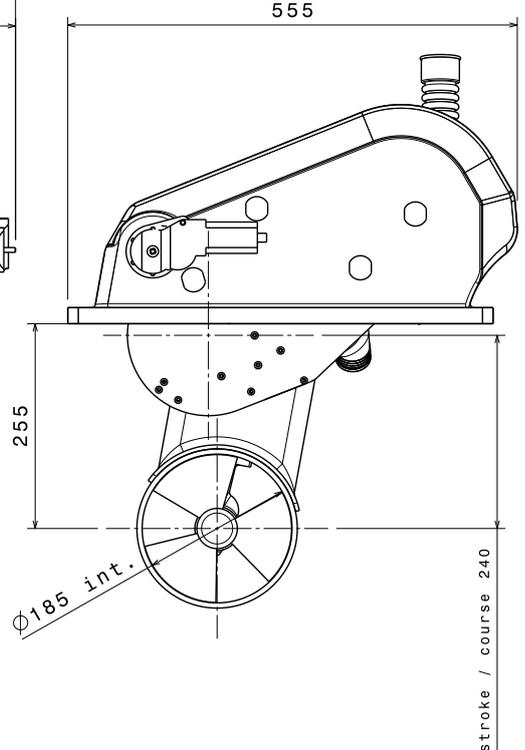

EN CAS DE DOUBT, MERCI DE NOUS CONTACTER
IN CASE OF DOUBT, PLEASE ASK

Unique Features:



Zero maintenance composite drive leg



Line shields



Case hardened spiro-conical gears



Seperate mounting base



Leaves smooth hull lines when retracted and achieves ideal immersion depth when deployed.

Control Panels:

Max Power's thruster control systems include a variety of **advanced safety features**.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible motor overheat warning
- Motor overheat shutdown after prior warning
- Standard automatic battery isolator control
- Time delay switch between port and starboard thrust
- Software protection against short circuits



Accessories:

The Compact Retract™ is delivered with grey joystick, control box, directional power control relay and 25m control cable. Mounting base and other accessories must be ordered separately.

Seperate mounting base for easy installation.

Mounting bases available in GRP and aluminium.

