SKYSOL Track Small

Order Form and Product Guide

Customer	Te	el	Order	Quote	Date
Address	Mobil	le	Project Name		
	Ema	ail	Project Location		

	1	2	3	4	5	6	7	8	9	10	11	12	13
	ID	Location	Width (X) ¹	Straight line Length(Y) ²	Honeycomb Fabric code ³	Single or Double Ended	Head rail	Moving rail	Side track	Track curved or straight ²	Fill in one optio Manual handle type	n only Powered switches, transformers or controls required	Qty
	1					Powered Single Manual Single Double Ended meet in middle Second Fabric	White Beige Graphite Custom	White Beige Graphite Custom	White Beige Aluminium Custom	DWG or CAD Template Straight (A radius greater than 6260 mm [246 7/16"] will be treated as straight)	None Plastic Articulating Fixed Metal Nickel Metal Chrome Clear (Control Rod) Rod Length (mm) Qty Toggle	Yes ⁴ No	
	2					Powered Single Manual Single Double Ended meet in middle Second Fabric	White Beige Graphite Custom	White Beige Graphite Custom	White Beige Aluminium Custom	Curved DWG or CAD Template Straight (A radius greater than 6260 mm [246 7/16"] will be treated as straight)	None Plastic Articulating Fixed Metal Nickel Metal Chrome Clear (Control Rod) Rod Length (mm) Qty 5 Toggle	Yes ⁴ No	
,	3					Powered Single Manual Single Double Ended meet in middle Second Fabric	White Beige Graphite Custom	White Beige Graphite Custom	White Beige Aluminium Custom	DWG or CAD Template Straight (A radius greater than 6260 mm [246 7/16"] will be treated as straight)	None Plastic Articulating Fixed Metal Nickel Metal Chrome Clear (Control Rod) Rod Length (mm) Qty 5 Toggle	Yes ⁴ No	


- 1. The blind will work in a recess that is up to 10mm wider than the specified X.
- 2. Template or drawing must be provided for curved tracks if the radius is less than 6260 [$246^{7/16}$ "].
- 3. 25mm Honeycomb only, please see fabric collection for codes.
- 4. Please fill in a powered accessories custom order form.
- 5. Specify quantity of rods per blind or boat set.
- 6. Colour matched to hardware.


Minimum and Maximum Dimensions

	Wid	th (X)	Drop (Y)			
				Max		
	Min	Max	Min	Single Ended	Double Ended Meet In the Middle	
Manual	450 mm [17 ^{3/4} "]	1200 mm [47 ^{1/4} "]	400 mm [15 ^{3/4} "]	2000 mm[78 ^{1/2} "]	3000 mm [118"]	
Powered	675 mm [26 ^{1/2} "]		700 mm [27 ^{9/16} "]	2000 11111[78 42]	N/A	

Powered



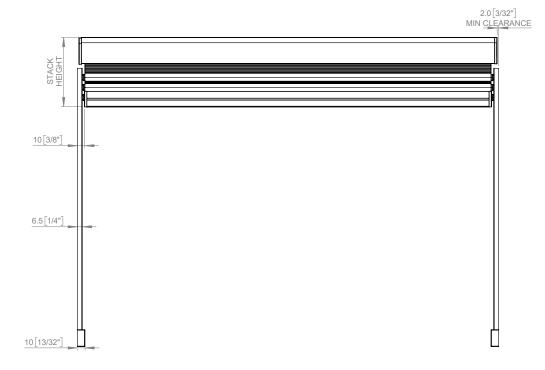

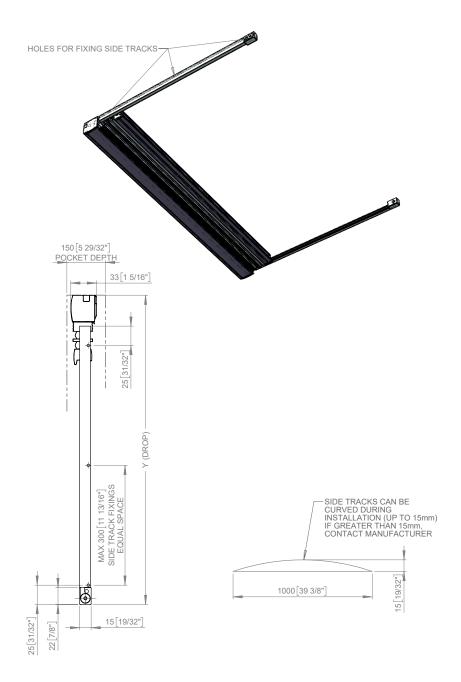

SKYSOL Track Small

Order Form and Product Guide

Manual

