


SKYSOL TRACK LARGE MANUAL (Please read instructions through first before starting.)


Single Ended, Full Travel Installation Instructions,

Including Double ended Meet in the Middle instructions (3a & 9a)


1. Arrange the blind as shown



2. Fit the head rail brackets as shown – the centre line should be at least 25mm below the surface. We recommend No.6 pan head screws (length suitable for the material to which it is being mounted).



3. For "Single Ended Full Travel" blinds
Position the side track against the far end of recess (opposite head rail). Install a screw through the second hole of the track, leaving the screw loose so that it can pivot.




Note: For "Double Ended Meet in the Middle", 2 blinds Blind 1



Position the fwd end of the side track at the midpoint along the recess drop at the required height. Install the screw through the second hole of the track, leaving the screw loose so the track can pivot.

Blind 2


Repeat steps 3a to 8a for the opposite end.

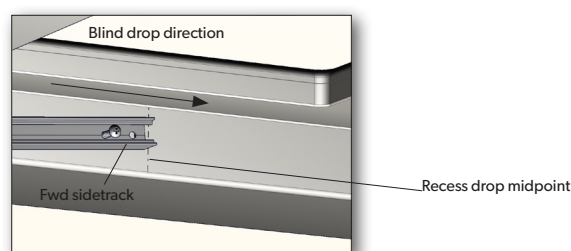


4. With both side tracks fitted and the handle pointing downwards feed the whole blind into the side tracks taking care to keep the cords outside the gliders. Keep the blind together.




Blinds with a curved front peak have different end caps which fit onto the outside of the side tracks (above and below). Also note that the side tracks on a curved peak blind have special bearing strips fitted to the top and bottom of the side tracks.

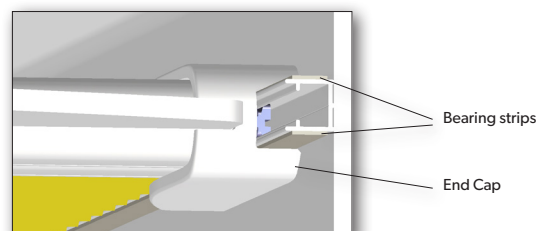


5. Lift the blind and side tracks up so that you can fit the head rail into the head rail clips.





6. Clip the head rail into the head rail clips by hooking the front of the rail into the clip and then pushing back until the back hook clips over the lip on the head rail (the head rail and the fabric have been sectioned in this view to show the clip more clearly).




Now push the head rail back until the clip lock over the rib on the back of the head rail.



7. If curved, fit the centre position of the track. Then fix head rail end by fitting screws through track stops.




8. For "Single Ended Full Travel" blinds
Pull the cord fixing block out and fix it in the far end using the screw provided.
There may be one or two cords each side depending on blind width.




Note : For "Double Ended Meet in the Middle", 2 blinds

Pull the cord fixing block out and fix it in the Aft end of the track (midpoint of recess drop) using the screw provided. There maybe one or 2 cords each side depending on blind width.

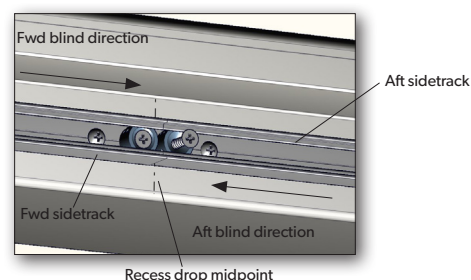

9. Fit the remaining screw in the side tracks, be sure not to damage extrusion or paintwork to ensure smooth travel of guides



10. Operate the blind, opening and closing a few times.
There should be enough tension to allow the moving rail to be left in any position and it will stay there. The gliders should run smoothly in the side tracks.

