
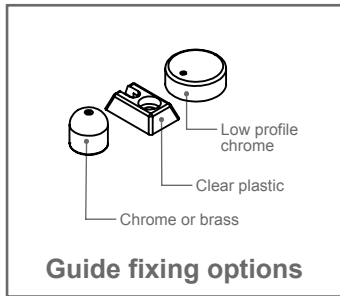



SKYVENETIAN

ALUMINIUM

Manual - 25mm Slat - Guide Wire - Mono Command

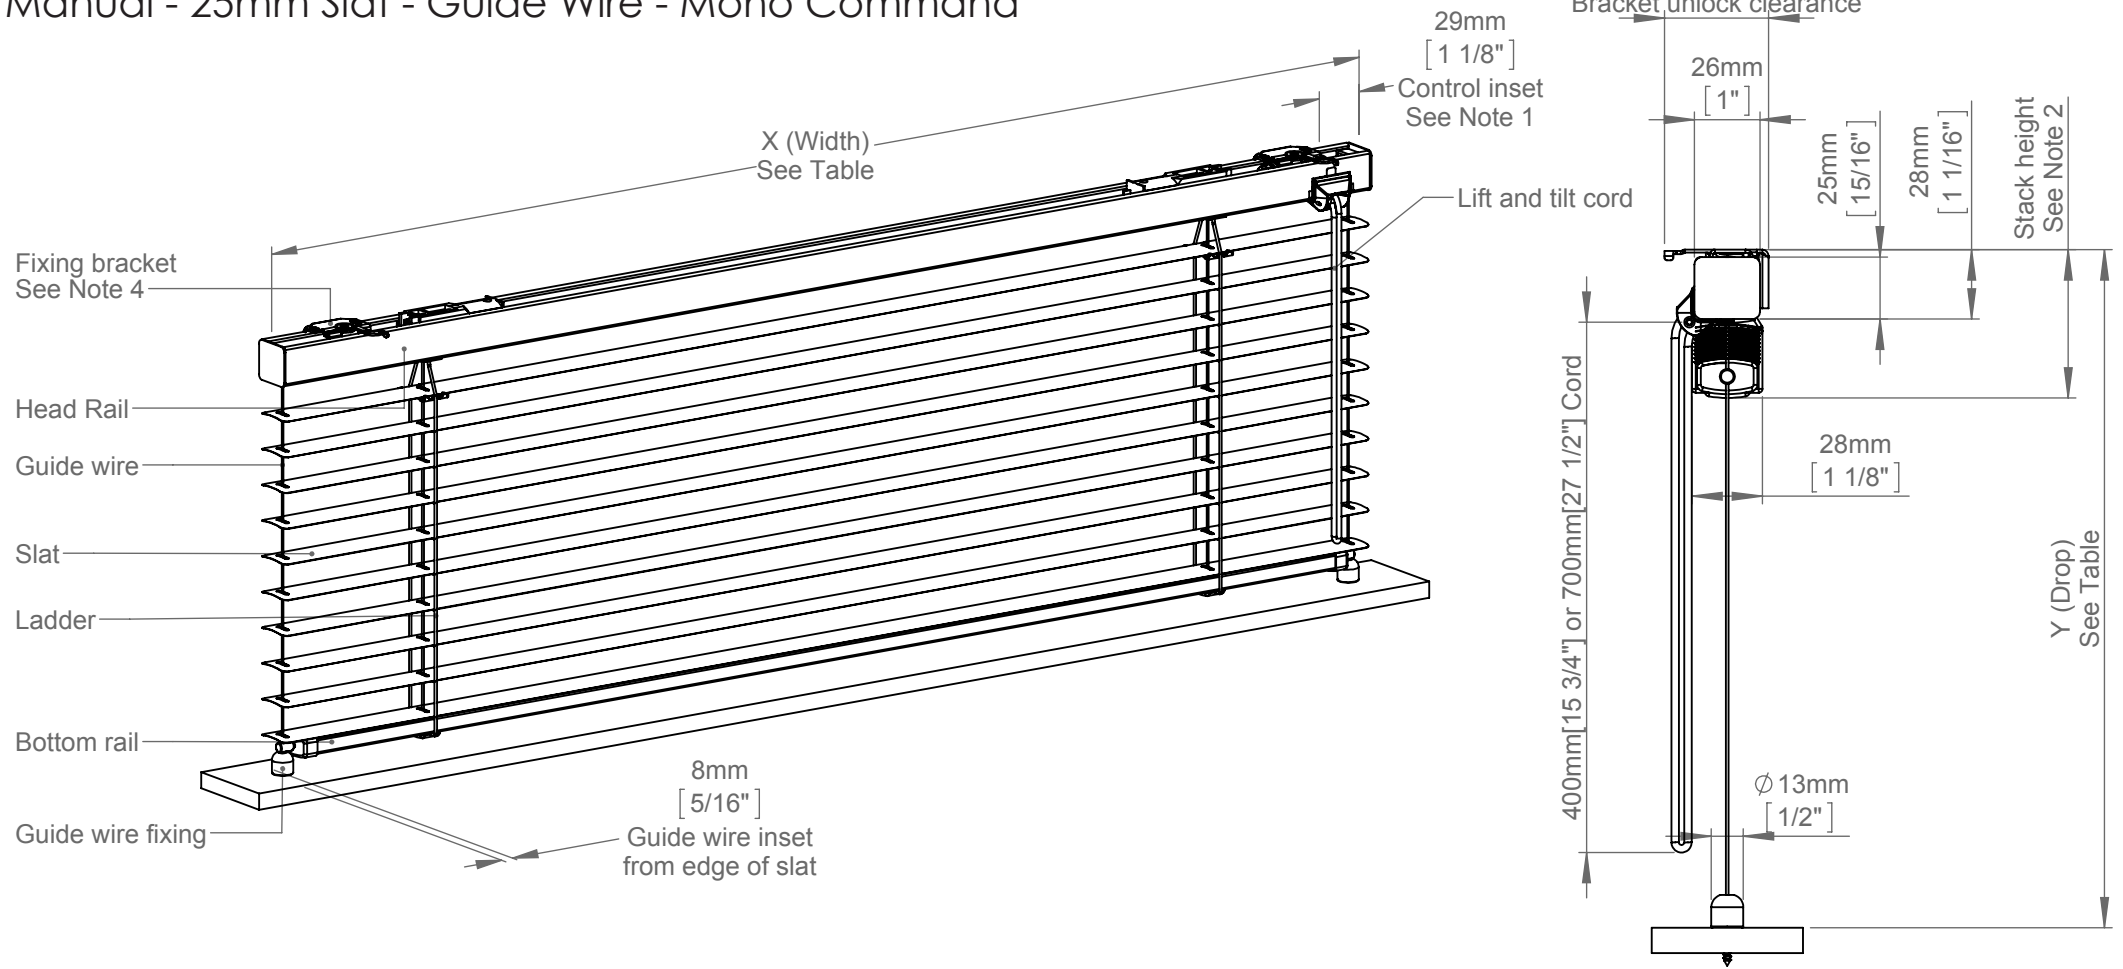

X(Width) & Y(Drop) Limits		
X (Min)	X (Max)	Y
375mm [14 3/4"]	3150mm [124"]	See Note 3

- Notes:
- 1 The position of the lift cord can be varied if necessary.
 - 2 Refer to Oceanair for further stack height information.
 - 3 Refer to Oceanair for minimum and maximum drop information.
 - 4 Bracket quantity dependent on width of blind.