

Shape 14 - Rectangle with sloped top edge

Order Form and Product Guide


Customer _____ Tel _____
 Address _____ Mobile _____
 _____ Email _____

Order _____ Quote _____ Date _____
 Project Name _____
 Project Location _____


Disclaimer: **Are any of the blinds on this order to be installed where children under 42 months old are likely to be allowed?** ⁶ **Yes No Signed _____ Print _____**

1	2	3	4	5	6	7	8	9	10	11	12	13			
Blind	Window Location	Fabric Honeycomb fabric not applicable on this shape	Blind or Recess	Hardware Colour	Blind Type	2 Bar or 3 Bar	3 Bar Cord Quick Tensioners ²	Stack Position	Fixing position / Reference ^{3,4}			Manual control options		Powered options	Qty
										Top Of Blind	Bottom Of Blind	Pull Cord Position	Handle Type		
1			Blind Recess	Beige White Graphite	AO (0°)	AO type blinds are 2 Bar only		Top Stack only on this shape	Face fix	FR2C	FP3	AO Blind Types only If an "AO" type blind is selected, a pull cord will be factory fitted on the longest vertical edge (Dim 'C' or 'D'). No other control is available Metal Cord Cleat <i>(With black or white rubber insert)</i> Chrome - Black Chrome - White Nickel - Black Nickel - White	AB, DB, DBE & PB Blinds Only Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing Articulating Fixed Handle Plastic ³ Metal Nickel Metal Chrome	Not Available on this shape	
					AO-DB (0° - 20°) ¹	2 Bar	Yes		HR3		CD2				
					AO-DBE (0° - 20°)	3 Bar	No			ND2					
					AB (0° - 30°)										
					DB (30° - 60°)										
					DBE (30° - 60°)										
					PB (60° - 90°)										
2			Blind Recess	Beige White Graphite	AO (0°)	AO type blinds are 2 Bar only		Top Stack only on this shape	Face fix	FR2C	FP3	AO Blind Types only If an "AO" type blind is selected, a pull cord will be factory fitted on the longest vertical edge (Dim 'C' or 'D'). No other control is available Metal Cord Cleat <i>(With black or white rubber insert)</i> Chrome - Black Chrome - White Nickel - Black Nickel - White	AB, DB, DBE & PB Blinds Only Clear (for control rod) Rod Length (mm) _____ Qty _____ Webbing Articulating Fixed Handle Plastic ³ Metal Nickel Metal Chrome	Not Available on this shape	
					AO-DB(0° - 20°) ¹	2 Bar	Yes		HR3		CD2				
					AO-DBE(0° - 20°)	3 Bar	No			ND2					
					AB (0° - 30°)										
					DB (30° - 60°)										
					DBE (30° - 60°)										
					PB (60° - 90°)										

Dimensions for :
Blind 1
Blind 2

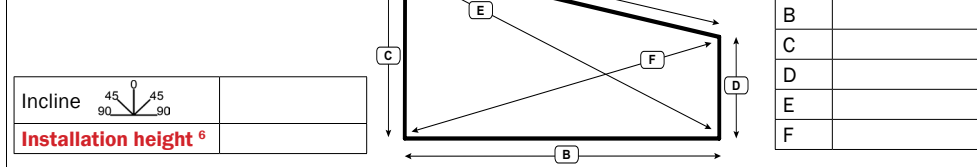

Dimensions for:
Blind 1
Blind 2

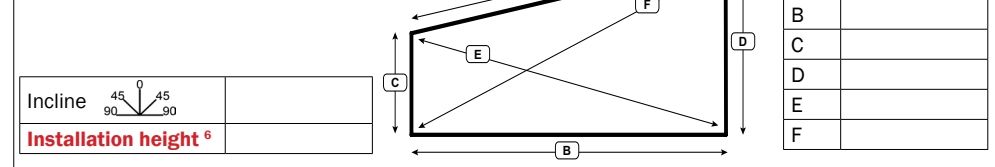

1. Guide wires run behind fabric.
2. Quick Tensioners are fitted to the guide wires on all 3 bar blinds. Quick Tensioners are optional on cords for easier tensioning.
3. See Manual Fixing Configurations on [page 2](#)
4. Colour matched to hardware.
5. Webbing handles cannot be fitted to Honeycomb blinds.
6. Installation height required for cord operated blinds (AO, AO-DB, AO-DBE). EN13120 Standards demand the distance from the floor to the bottom of the pull cord(s) shall be at least 1500mm [59 1/16"] and a cord collection device (cleat) is fitted at or above this height. We can only supply blinds meeting these conditions unless the above disclaimer is completed and signed.

Additional requirements.




Shape 14 - Rectangle with sloped top edge


Order Form and Product Guide

Manual Fixing Configurations


Recess Fix




2 BAR RECESS FIXED
BLIND Type:
AO



2 BAR FOOTPLATE RECESS FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB

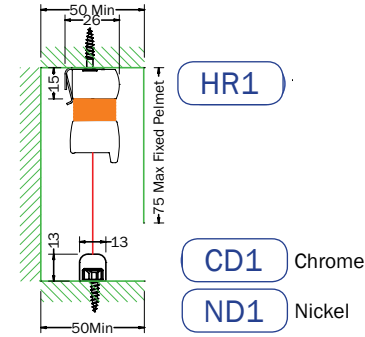


2 BAR DOME RECESS FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB




3 BAR RECESS FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB


Face Fix




2 BAR FACE FIXED
BLIND Type:
AO



2 BAR FOOTPLATE FACE FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB



2 BAR DOME FACE FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB



3 BAR FACE FIXED
BLIND Types:
AO-DB, AO-DBE,
AB, DB, DBE, PB